

Corbelle[™] Skirted Trapway Two-Piece Toilet

Features

- Vitreous China.
- Comfort Height[®] Elongated Bowl.
- Revolution 360[™] swirl flushing system powered by AquaPiston[®].
- Includes left-hand polished chrome trip lever.
- 1.28 gpf (4.8 lpf).
- 2-1/8" (54 mm) fully glazed skirted trapway.
- Patented ReadyLock[™] installation system.
- 12" (305 mm) rough-in.
- CleanCoat[®] surface coating.
- Less seat and supply.
- 9-3/4" (248 mm) x 7-1/4" (184 mm) water area.
- 29 1/2" (749 mm) x 16-1/2" (419 mm) x 31-3/8" (797 mm).
- Floor mount / Floor outlet.

Recommended Accessories

K-4008 Reveal® Quiet-Close™ Elongated Toilet Seat K-4108 C3®-230 Elongated Cleansing Toilet Seat K-7637 Angle Supply with Stop (single) K-5383 10" Rough-in Full Skirt Trap and Attachment System K-5381 14" Rough-in Full Skirt Trap and Attachment System K-20120-L Trip Lever

Components

Product includes: K-4143 Toilet Tank K-4144 Elongated Toilet Bowl Additional included component/s: Tank Cover, Trip Lever, and ReadyLock™ installation system.





Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651 OBC

KOHLER[®] One-Year Limited Warranty


See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color Code Description

0	White
96	Biscuit
NY	Dune
95	lce™ Grey
G9	Sandbar
7	Black Black™








Corbelle™

Skirted Trapway Two-Piece Toilet

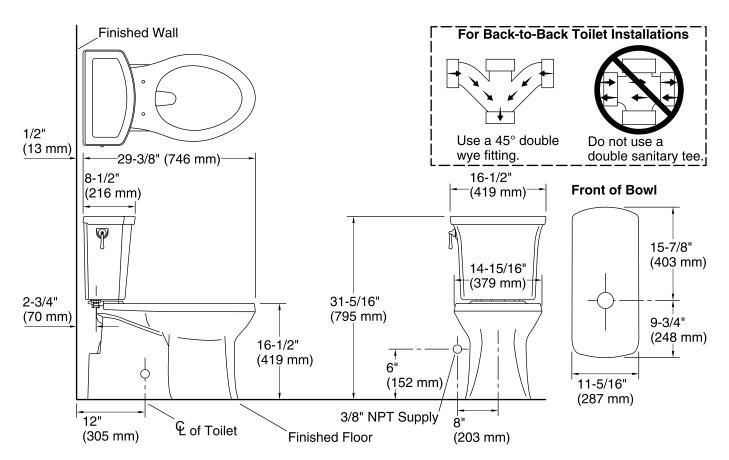

Technical Information

All product dimensions are nominal.

Toilet type:	Two-piece, Floor-mount
Waste Outlet:	Floor
Bowl shape:	Elongated front
Flush type:	Gravity siphon jet
Trap passageway:	2-1/8" (54 mm)
Water Consumption	
Full:	1.28 gpf (4.8 lpf)
Water surface size:	9-3/4" x 7-1/4" (248 mm x 184 mm)
Rim to water surface:	6-1/4" (159 mm)

Fixture Supply Requirements

Min static pressure:	15 psi (103.4 kPa)
Max static pressure:	80 psi (551.6 kPa)

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

Plumbing Codes require elongated toilets and elongated, open-front toilet seats in public bathrooms.

Accessibility standards require controls to be located on the open side of the toilet.





OPTIONAL UPGRADE - Corbelle®

ContinuousClean XT toilet tank, 1.28 gpf

Features

- 1.28 gpf (4.8 lpf)
- Left-hand Polished Chrome trip lever
- ContinuousClean system automatically dispenses cleaning solution with every flush
- Works with any white toilet bowl cleaner tablet. Tablets last up to one year in ContinuousClean XT system
- AquaPiston[®] canister optimizes the flow out of the tank, harnessing gravity and the natural powerful reducing cascade of water to increase the power and effectiveness of the flush
- Easy-to-flush canister design requires less force to actuate than a 3" (76 mm) flapper, and has 90% less exposed seal material which resists conditions that cause wear, tear, shrinkage and swelling
- Optional: uses two AAA batteries (included) to power the LED system indicator light. System indicator light will notify user when system is working properly and when to replace cleaning agent or batteries
- Adjustment dial lets you set how much cleaning solution is dispensed with every flush

Technical Information

All product dimensions are nominal.			
Toilet type:	Bowl-mount		
Flush type:	AquaPiston		





Codes/Standards ASME A112.19.2/CSA B45.1 EPA WaterSense®

KOHLER[®] Toilets and Seats Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	NY	Dune
	95	lce™ Grey
	7	Black Black™

